


Reactel, Incorporated

Reacting First to All Your Filter Needs.

Cavity Bandpass Filter

8C9-2208-X20S11

This bandpass filter passes 2198 – 2218 MHz with low loss and high out of band attenuation. Reactel manufactures a wide variety of Filters, Multiplexers and Multifunction Assemblies; please contact us with your requirements.

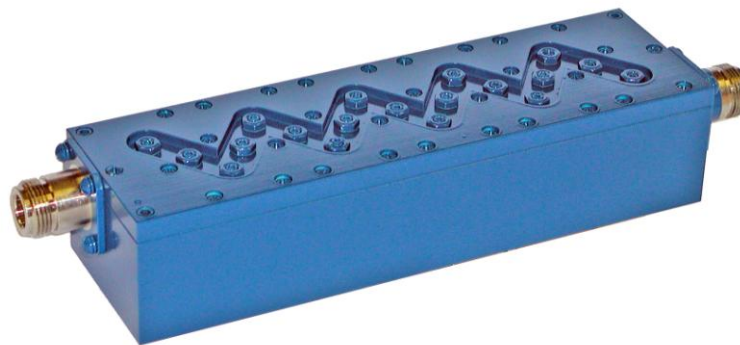

Specifications

| | |
|------------------|--|
| Center Frequency | 2208 MHz |
| Passband | 2198 – 2218 MHz, minimum |
| Insertion Loss | ≤ 0.7 dB @ 2198 – 2210 MHz ≤ 1.15 dB @ 2118 MHz |
| Return Loss | ≥ 15 dB @ Passband |
| Attenuation | ≥ 66 dB @ 2230 MHz ≥ 55 dB @ 2175 MHz |
| Connectors | SMA Female in / out |
| Size | 1.25" high x 4.4" wide x 8.5" long, nominal excluding connectors |