


Ceramic GSM - 900 Bandpass Filter

4CX-902.5-X25Q

Reactel, Incorporated's 4CX-902.5-X25Q GSM - 900 Bandpass Filter features low insertion loss in a very compact and lightweight package. We offer a number of variations of this unit, please consult the factory so that we may meet your exact specification.

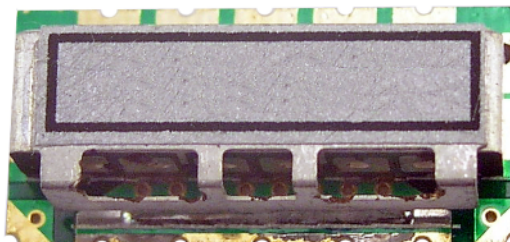

Specifications

Center Frequency	902.5 MHz
Passband	890 – 915 MHz, minimum
Insertion Loss	≤ 1.2 dB @ CF
Insertion Loss	≤ 2.2 dB @ Bandedges
Return Loss	≥ 18 dB @ Passband
Impedance	50 Ω, nominal in / out
Rejection	≥ 15 dB @ 935 – 930 MHz
Operating Temperature Range	-15° to +55° C
Connectors	Solder Pads for SMT
Size	0.28" high x 0.5" wide x 0.85" long



Reactel, Incorporated - Reacting First to Your Filter Requirements

8031 Cessna Avenue ▪ Gaithersburg, Maryland 20879

Phone: 301-519-3660 ▪ Fax: 301-519-2447 ▪ reactel@reactel.com ▪ www.reactel.com